




ZC-16DI-8DO

16 CH DIGITAL INPUT - 8 CH DIGITAL OUTPUT / CANOPEN - MODBUS MODULE

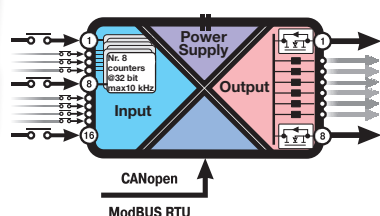

ZC-16DI-8DO is an 16 CH input / 8 CH output mixed module. The inputs have 32-bit counters / 10 kHz max frequency, mosfet Outputs with shared negative pole. The communication protocols are CANopen or ModBUS RTU (protocol selectable through dip-switch). A 3-way galvanic isolation among Power supply // input // RS485 circuits assures the integrity of your datas

TECHNICAL SPECIFICATIONS

General Data

Power supply	10..40 Vdc; 19..28 Vac
Power consumption	2,5 W
Status indicator	Digital outputs, communication
Galvanic isolation	1,5 kVac (3 way)
Response time	~ 1 ms
Operating temperature	-10..+65 °C
Dimensions (w x h x d)	35 x 100 x 112 mm
Enclosure, weight, colour	PBT, 170 g, black
Connections	Removable screw terminals IDC10 connector for Z-PC-DIN backplane RS232, front jack, speed 2400 Baud
Protection degree	IP20
Configuration	Dip Switches (baud rate, Node ID) EDS file CAN bus standard (2.0A, 2.0B)
Protocols supported	CANopen (profile CiA 401 v.2.01) ModBUS RTU (through RS232)
CANopen max speed	1 Mbps
Special functions	CANopen/ModBUS protocol switching
Conformity	CE, EN 61000-6-4, EN 64000-6-2, EN 61010-1 CAN 2.0A, 2.0B CiA 401 v.2.01


Input Data

Nr channels	16
Polarity	EN 61131-2 type 2, synq (pnp)
Counters	N.8 @ 32 bit, Max freq. 10 KHz Increment individual configurable, reset, preset Overflow indication
Vmax	30 V
Minimum pulse width	250 µs
ON/OFF delay	< 3ms
TPDO	< 1ms

Output Data

Nr channels	8
Type	Mosfet (open source) with shared common
Power supply Voltage	5..30Vdc
Maximum Current	0.5 A (connection from terminals) 25 mA (connection from connectors)
ON/OFF delay	< 1ms
RPDO	< 1,25ms

APPLICATION NOTE

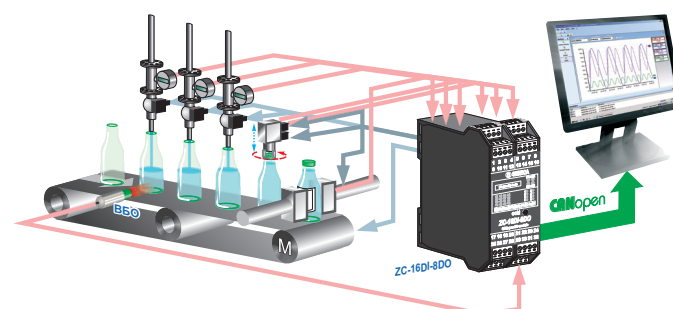

ORDER CODES

Code	Description
ZC-16DI-8DO	16 CH digital input - 8 CH digital output CANopen / ModBUS module, 10..40 Vdc / 19..28 Vac

ACCESSORIES & SOFTWARE

Z-PC-DIN Backplane for power & bus communication pg. 36	Z-SUPPLY Switching power supply pg. 36	Z-8R-10A 8-CH Relay interface, 10A pg. 36	EASY SETUP Plug&Play configuration software pg. 36

SIMILAR PRODUCTS

ZC-24DI 24 CH digital input CANopen / ModBUS pg. 28	ZC-24DO 24 CH digital output CANopen / ModBUS pg. 29	Z-D-IO 8-CH, 6 digital input - 2 digital outputs control module pg. 14