

## Programmable pressure transmitters

# PTM

---



Version: 28.06.2012

# Technical Specifications

## Pressure measuring range (bar)

	0.1 ... 0.5	> 0.5 ... 2	> 2 ... 25
<b>Overpressure</b>	3 bar	3 x FS ( $\geq 3$ bar)	3 x FS
<b>Burst pressure</b>	> 200 bar	> 200 bar	> 200 bar
<b>Accuracy, (3), (<math>\pm</math> % FS)</b>	$\leq 0.25$	$\leq 0.1$	$\leq 0.1$
<b>Thermal shift, (<math>\pm</math> % FS/<math>^{\circ}</math>C)</b>			
Zero point 0...70 $^{\circ}$ C	$\leq 0.06$	$\leq 0.03$	$\leq 0.015$
Span 0...70 $^{\circ}$ C	$\leq 0.015$	$\leq 0.015$	$\leq 0.015$
Zero point -25...85 $^{\circ}$ C	$\leq 0.08$	$\leq 0.04$	$\leq 0.02$
Span -25...85 $^{\circ}$ C	$\leq 0.02$	$\leq 0.02$	$\leq 0.02$
<b>Total Error, (4), (5), (<math>\pm</math> % FS)</b>			
-10...50 $^{\circ}$ C, (typ. / max.)	$\leq 0.15 / 0.3$ ( $\leq 200$ mbar: 0.3 / 0.6)	$\leq 0.15 / 0.3$	$\leq 0.15 / 0.3$
-25...85 $^{\circ}$ C, (typ. / max.)	$\leq 0.65 / 0.7$ ( $\leq 200$ mbar: 0.65 / 0.8)	$\leq 0.65 / 0.7$	$\leq 0.55 / 0.7$
<b>Long term stability, (6)</b>	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

	> 25 ... 600, (1), (2)	> 600 ... 1000, (1)
<b>Overpressure</b>	3 x FS ( $\leq 850 / \leq 1500$ bar)	1500 bar
<b>Burst pressure</b>	> 850 / $\leq 1500$ bar	> 1500 bar
<b>Accuracy, (3), (<math>\pm</math> % FS)</b>	$\leq 0.1$	$\leq 0.25$
<b>Thermal shift, (<math>\pm</math> % FS/<math>^{\circ}</math>C)</b>		
Zero point 0...70 $^{\circ}$ C	$\leq 0.015$	$\leq 0.015$
Span 0...70 $^{\circ}$ C	$\leq 0.015$	$\leq 0.015$
Zero point -25...85 $^{\circ}$ C	$\leq 0.02$	$\leq 0.02$
Span -25...85 $^{\circ}$ C	$\leq 0.02$	$\leq 0.02$
<b>Total Error, (4), (5), (<math>\pm</math> % FS)</b>		
-10...50 $^{\circ}$ C, (typ. / max.)	$\leq 0.15 / 0.3$	n.a.
-25...85 $^{\circ}$ C, (typ. / max.)	$\leq 0.55 / 0.7$	n.a.
<b>Long term stability, (6)</b>	< 0.1% FS / < 0.2% FS	< 0.1% FS / < 0.2% FS

(1) Titanium available  $\leq 400$  bar (burst pressure > 550 bar)

(2) Overpressure and burst pressure 1500 bar (stainless steel) optional

(3) Zero based accuracy according to DIN16086, incl. hysteresis and repeatability at ambient temperature

(4) Total error including accuracy and temperature influences at maximum signal span (16 mA)



(5) Active compensated,  $\leq 100$  bar

(6) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

## Temperature range

<b>Operating temperature</b>	-25...85 $^{\circ}$ C
<b>Process temperature</b>	-40...150 $^{\circ}$ C
<b>Storage temperature</b>	-25...85 $^{\circ}$ C

## Electrical specifications

	4 ... 20 mA
<b>Resolution</b>	0.025% FS
<b>Output adjustable</b>	
4 mA	-5% FS...105% FS
20 mA	-5% FS...105% FS
Span	25% FS...110% FS (≥ 50 mbar)
Low pass filter	0.1 / 1 / 10 / 30 Hz (standard: 30 Hz)
<b>Power supply</b>	9...33 V DC
Supply influence	< 0.1% FS
<b>Circuit diagram</b>	
<b>Load resistance</b>	
Load resistance influence	< 0.1% FS

## Qualifications

	Description	Level	Typical interferences
<b>EN 60068-2-6</b>	Vibration	4g (4...100 Hz / ± 3.2 mmpp)	
<b>EN 60068-2-27</b>	Shock	100g (impulse duration 6 ms)	
<b>EN 55022</b>	Emission, class B	< 30 dBμV/m (0.03...1 GHz)	
<b>EN 61000-4-2</b>	Electrostatic discharge	4 kV contact 8 kV air	
<b>EN 61000-4-3</b>	Irradiated RF	10V/m (0.08...1 GHz)	Radio sets, wireless phones
<b>EN 61000-4-4</b>	Transients (burst)	2 kV	Motors, valves
<b>EN 61000-4-5</b>	Surge	10 kA (8 / 20 μs), (1)	Lightning
<b>EN 61000-4-6</b>	Conducted RF	10 V (0.15...80 MHz)	Frequency converters

(1) Only with optional surge (lightning) protection

## Physical specifications

<b>Materials</b>	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (standard), EPDM, Kalrez
Cable	PUR, FEP PE

(1) Hastelloy (C-276) on request

# Equipment

---

## Overview

10.00.0091	Accessories overview

---

## Interface

101138	PTM - Interface

---

## Software

101224	PC Software V1.50

# Additional documents

---

## Manuals

	Article number	Description
10.00.0079	DEB003	Configuration software
10.00.0089	DEB005	User manual

---

## Operating and safety instructions

	Article number
10.00.0137	DMM009

## Ordering information










		X. XXXX.	XXXX.	XX.	XXX
<b>Type</b>					
	PTM	40			
<b>Pressure type</b>					
	Gauge	1			
	Absolute (vacuum)	2			
	Sealed gauge	3			
<b>Pressure measuring range</b>					
	Any pressure measuring ranges between 0...100 mbar and 0...1000 bar available, (1), (2)	XX			
<b>Process connection</b>					
	G 1/4 F, (Fig. 1)	00			
	G 1/4 M, (Fig. 2)	11			
	G 1/4 M, manometer DIN 16288, (Fig. 3)	12			
	G 1/2 M, (Fig. 4)	13			
	G 1/2 M, frontal diaphragm, (Fig. 5)	14			
	G 1/2 M, flush diaphragm, (Fig. 6)	15			
	G 1/2 M, manometer DIN 16288, (Fig. 7)	16			
	1/4 NPT M, (Fig. 9)	10			
	1/2 NPT M, (Fig. 8)	19			
	Customized connection available	XX			
<b>Electrical connection</b>					
	DIN 43650, demountable, IP 65, (Fig. 10), (3)		01		
	Binder 723, 5-pin, IP 67, (Fig. 11), (3)		03		
	Binder 723, 7-pin, demountable, IP 67, (Fig. 11), (3)		04		
	MIL C26482, 10-6, IP 40, (Fig. 13), (3)		06		
	PE cable, IP 67, (Fig. 12), (4), (5)		13		
	PUR cable, IP 67, (Fig. 12), (4), (6)		15		
	FEP, IP 67, (Fig. 12), (4)		21		
	PVC cable, blue, IP 68 (Fig. 12), (9)		14		
	Customized connection available		XX		
<b>Output signal</b>					
	4...20 mA		05		
	4...20 mA with surge (lightning) protection		08		
<b>Accuracy</b>					
	$\leq \pm 0.25\%$ FS ( $\leq 500$ mbar / $> 600$ bar)			0	
	$\leq \pm 0.1\%$ FS ( $> 500$ mbar...600 bar)			1	
<b>Temperature range</b>					
	0...70 °C compensated (allowed process temperature: 0...80 °C)			0	
	-25...85 °C compensated (allowed process temperature: -25...100 °C)			1	
	-25...85 °C compensated (allowed process temperature: -25...150 °C)			2	
<b>Option 1</b>					
	Throttle, (7)				A
	Special oil filling: ASEOL Food (for food applications)				G
	Special oil filling: Halocarbon (for oxygen applications), (8), (10)				H
<b>Option 2</b>					
	Electronics packed in gel: Gauge pressure				C
	Electronics packed in gel: Absolute pressure				D
<b>Option 3</b>					
	Active compensated ( $\leq 100$ bar)				E

Version titanium					K
Seals: Viton (standard)					U
Seals: EPDM					S
Seals: Kalrez					T
Seals: NBR					H
Aging					Z

- (1) Titanium available  $\leq$  400 bar (burst pressure > 550 bar)
- (2) mbar, PSI, kPa etc. available
- (3) Cable socket connector not included
- (4) Please specify the required cable length and medium
- (5) Suitable for drinking water (food approved)
- (6) For operating temperature > 50°C, PE or FEP cable must be used
- (7) Only with pressure connection Fig. 2, Fig. 3, Fig. 4, Fig. 7, Fig. 8 and Fig. 9
- (8) Maximum pressure measuring range  $\leq$  270 bar (burst pressure > 400 bar)
- (9) ACS Certification
- (10) min. Medium temperature -25 ° C


# Technical drawings

## Pressure connections




## Dimensions

Version for medium temperature up to 100°C



L = 74 mm for DIN 43650 connector (Fig. 10)


Version for medium temperature >100°C up to a max. 150°C

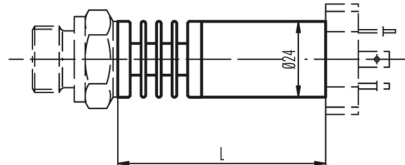

L = 101 mm for DIN 43650 connector (Fig. 10)

## Electrical connections


Fig. 10



Top view of cable socket connector

Pin	2-wire
1	+Vin
2	Pout

Fig. 11

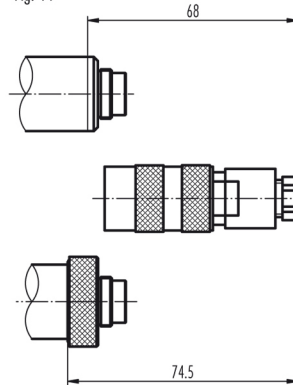


Top view of cable socket connector




Pin	2-wire
1	Pout
2	
3	+Vin
4	
5	

Fig. 13




Top view of cable socket connector



Pin	2-wire
A	+Vin
B	
C	Pout
D	
E	
F	

Fig. 12



Colour	2-wire
white	+Vin
yellow	Pout

Specifications may change without notice.

**STS Headquarters, Switzerland:**  
 STS Sensor Technik Sirmach AG  
 Rütihofstrasse 8, 8370 Sirmach, Switzerland  
 sales@stssensors.com | www.stssensors.com

**STS France:**  
 STS France  
 844 Route de la Caille, 74350 Allonzier la Caille, France  
 info-fr@stssensors.com | www.stssensors.fr

**STS Germany:**  
 STS Sensoren Transmitter Systeme GmbH  
 Poststrasse 7, 71063 Sindelfingen, Germany  
 info-de@stssensors.com | www.stssensors.de

**STS Great Britain:**  
 STS Great Britain Ltd.  
 Higham Dairy Farm, Bumhill Lane, Alfreton | Derbyshire | Great Britain, DE55 6AH  
 contact@stssensors.com | www.stssensors.co.uk

**STS Italy:**  
 STS Italia s.r.l.  
 Via Gesù 5, 20090 Opera (Milano), Italy  
 info-italia@stssensors.com | www.stssensors.it