

Miniature submersible level transmitters

**MTM/N 10**

---



## Technical specifications for passive version

### Pressure measuring range (mH<sub>2</sub>O)

	10 ... 20	> 20 ... 40	> 40 ... 100
<b>Overpressure</b>	3 x FS	3 x FS (≤ 12 bar)	12 bar
<b>Accuracy, (1) (± % FS)</b>	≤ 0.5 / ≤ 0.25	≤ 0.5 / ≤ 0.25	≤ 0.5 / ≤ 0.25
<b>Setting accuracy</b>			
Zero point	± 1mV	± 1mV	± 1mV
Span	± 2 %	± 2 %	± 2 %
<b>Thermal shift, (± % FS/°C)</b>			
Zero point -5...50°C	≤ 0.06	≤ 0.03	≤ 0.015
Span -5...50°C	≤ 0.015	≤ 0.015	≤ 0.015
<b>Long term stability, (2)</b>	≤ 0.2% FS / < 4 mbar	≤ 0.1% FS / < 0.2% FS	≤ 0.1% FS / < 0.2% FS

(1) Best Straight Line (BSL) at ambient temperature

(2) 1 year (typ. / max.)

### Typical output signal (mH<sub>2</sub>O)

	10 ... 20	> 20 ... 40	> 40 ... 100
<b>Output signal, (1), (mV)</b>	50	100	100

(1) At nominal pressure, 10 V DC

## Technical specifications for active version, (1)

### Pressure measuring range (mH<sub>2</sub>O)

	10 ... 20	> 20 ... 40	> 40 ... 100
<b>Accuracy, (2) (± % FS)</b>	≤ 0.5 / ≤ 0.25 / ≤ 0.1	≤ 0.5 / ≤ 0.25 / ≤ 0.1	≤ 0.5 / ≤ 0.25 / ≤ 0.1
<b>Thermal shift, (± % FS/°C)</b>			
Zero point -5...50°C	≤ 0.06	≤ 0.03	≤ 0.015
Span -5...50°C	≤ 0.015	≤ 0.015	≤ 0.015

(1) For further specifications see ATM/N

(2) Zero based accuracy according to DIN16086, incl. hysteresis and repeatability at ambient temperature

## Technical specifications with datalogger, (1)

### Pressure measuring range (mH<sub>2</sub>O)


	10 ... 20	> 20 ... 40	> 40 ... 100
<b>Accuracy, (2) (± % FS)</b>	≤ 0.1	≤ 0.1	≤ 0.1
<b>Thermal shift, (± % FS/°C)</b>			
Zero point -5...50°C	≤ 0.06	≤ 0.03	≤ 0.015
Span -5...50°C	≤ 0.015	≤ 0.015	≤ 0.015

(1) For further specifications see DL or DL/N70

(2) Zero based accuracy according to DIN16086, incl. hysteresis and repeatability at ambient temperature

# Electrical specifications for passive version

## Pressure range
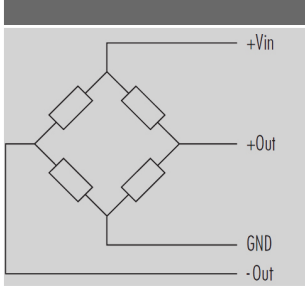
<b>Circuit diagram</b>	
<b>Input impedance</b>	> 10 kOhm
<b>Bridge resistance, (typ.)</b>	3 kOhm
<b>Supply voltage, (typ. / max.)</b>	10 / 15 V DC
<b>Cable length (max.)</b>	200 m

## Physical specifications, (1)

<b>Materials</b>	
Transducer	Stainless steel (316L / 1.4435)
Housing	Stainless steel (316L / 1.4404)
Seals	NBR
Cable	PUR, PE

(1) Only for level transmitter MTM/N10

## Equipment

### Overview

<b>10.00.0091</b>	Accessories overview
-------------------	----------------------

## Additional documents

### Operating and safety instructions

	Article number
<b>10.88.0369</b>	DMM030

## Ordering information

		X. XXXX.	XXXX.	XX.	XXX
<b>Type</b>	MTM/N 10	15			
<b>Pressure type</b>	Gauge	1			
	Absolute (vacuum)	2			
<b>Pressure measuring range</b>	Any pressure measuring ranges between 0...10 mH2O and 0...100 mH2O available, (1)	XX			
<b>Process connection</b>	Closed, (Fig. 1)	55			
	Open, (Fig. 2)	56			
<b>Electrical connection</b>	PE cable, IP 68, (2), (3)		0		
	PUR cable, IP 68, (2)		1		
	PE cable, IP 68, (2), (3), (4)		X		
	PUR cable, IP 68, (2), (4)		X		
	Connectable version, IP 68, (Fig. 5), (5), (6)		3		
<b>Output signal</b>	0...mV (specified by the customer), (Fig. 1 / 2), (8)		13		
	4...20 mA, (Fig. 3), (9)		05		
	0...20 mA, (Fig. 3), (9)		00		
	0...5 V DC, (Fig. 3), (9)		46		
	0...10 V DC, (Fig. 3), (9)		47		
	RS485, (Fig. 5), (6), (9)		62		
<b>Accuracy</b>	≤ ± 0.5 % FS, (7), (8)			0	
	≤ ± 0.5 % FS, (9)			0	
	≤ ± 0.25 % FS, (7), (8)			1	
	≤ ± 0.25 % FS, (9)			1	
	≤ ± 0.1 % FS, (on request), (9)			2	
<b>Temperature range</b>	-5...50 °C compensated (allowed process temperature: -5...50 °C)			4	
<b>Option 1</b>					
<b>Option 2</b>					
<b>Option 3</b>	Version titanium				K

(1) mH2O, mWS, mWC etc. available

(2) Please specify the required cable length and medium

(3) Suitable for drinking water (food approved)

(4) Connecting cable between MTM/N10 and electronics

(5) Connector with required cable has to be ordered separately (KART100)

(6) Only with datalogger DL/N70

(7) BSL: Best Straight Line

(8) Passive version

(9) Active version

# Technical drawings

## Dimensions

Fig. 1: Passive version, closed




Fig. 3: Active version

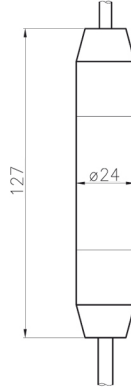


Fig. 5: Version with datalogger DL/N Series 70



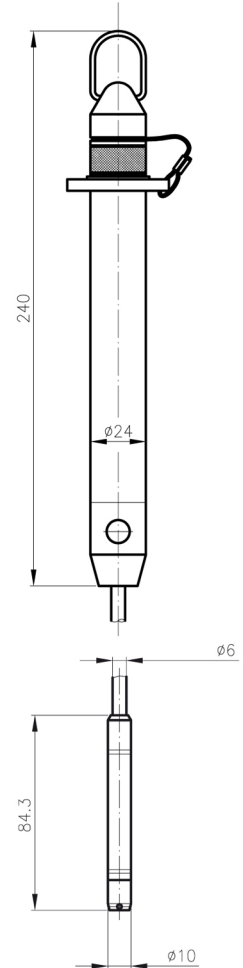


Fig. 2: Passive version, open



Colour	Connection configuration
	Passive version
white	+Vin
yellow	GND
brown	+Out
green	- Out

Connection configuration with separate electronics, see datasheet ATM/N, Series 24  
 Connection configuration with datalogger, see datasheet DL/N, Series 64/70

Specifications may change without notice.

**STS Headquarters, Switzerland:**  
 STS Sensor Technik Sirmach AG  
 Rütihofstrasse 8, 8370 Sirmach, Switzerland  
 sales@stssensors.com | www.stssensors.com

**STS France:**  
 STS France  
 844 Route de la Caille, 74350 Allonzier la Caille, France  
 info-fr@stssensors.com | www.stssensors.fr

**STS Germany:**  
 STS Sensoren Transmitter Systeme GmbH  
 Poststrasse 7, 71063 Sindelfingen, Germany  
 info-de@stssensors.com | www.stssensors.de

**STS Great Britain:**  
 STS Great Britain Ltd.  
 Higham Dairy Farm, Bumhill Lane, Alfreton | Derbyshire | Great Britain, DE55 6AH  
 contact@stssensors.com | www.stssensors.co.uk

**STS Italy:**  
 STS Italia s.r.l.  
 Via Gesù 5, 20090 Opera (Milano), Italy  
 info-italia@stssensors.com | www.stssensors.it